FRONT END CYLINDER

TYPE : MFC


SERIE : Ø 187

CYL.TYPE

MFC 187.5.8050 - Ic.0267

For Tipping Weight See Advices Below

Technical Characteristics

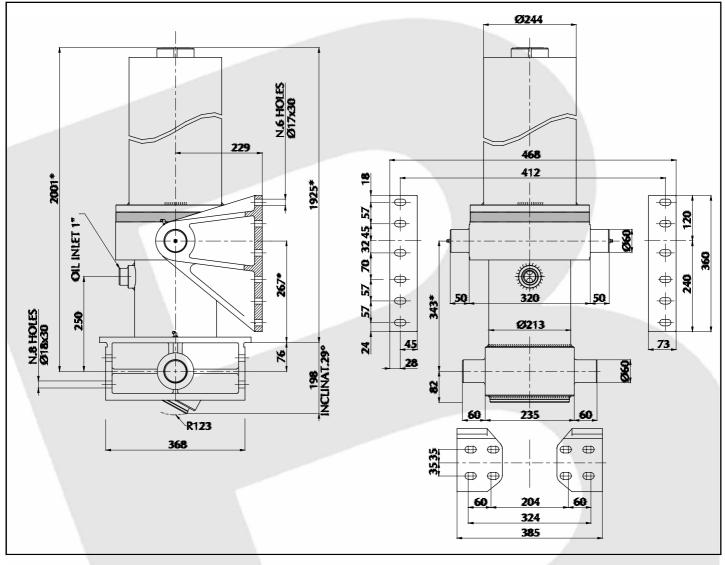

Cylinder stages

Oymnuci Stuges																	
Ø Stage	Ø045	Ø060	Ø076	Ø092	Ø108	Ø069	Ø088	Ø107	Ø126	Ø145	Ø165	Ø167	Ø187	Ø210	Ø236	Ø265	
Thrust at 200 Bar [Tons]								18.00	24.90	33.00	42.80		54.90				
Stages of cylinder								0	0	0	0		0			/	
Specifications		Brackets and Accessories															
Stages number	ges number			05				Chassis bracket [2 Units x cylinder]					SIL#MIH 15.48 [Kgs] x 2 =				
Cylinder Stroke [mm]			8050					Lifting bracket right hand				SSL	SSL#PMH 11.80 [Kgs] x 1 =				
Cylinder weight only [Kgs]			497					Lifting bracket left hand				SSL	SSL#PNH 11.80 [Kgs] x 1 =				
Working volume [Ltrs]			139.7					Chassis brackets mounting kit				KFS	KFSI#001				
Max Working pressure	[Bar]	20	200					Lifting bracket mounting kit				KFS	KFSS#003				
Technical information								Recomm	endatio	n		•					
Oil : See oil specification sheet								This Binotto cylinder is designed as a lifting device only									
Tipping weight : Net weight body + Payload								Lt must not be used as a structural member or be subject to side loads									
□ Fitted centres [*] : Closed centres plus 20 mm pull out								Pump flow in consultation with Binotto engineering department									
Advices																	

All our cylinders are manufactured to suit the particular application in the differing world markets/climate. Should you require details of the exact lifting capacity of the cylinder that has been selected for your application/vehicle then please contact our technical department who will be only pleased to explain or advise.

BINOTTO SRL

Edit.: 04 • 2006 Rev.: 01 • 2006 Date: 01.09.2006

BINOTTO IS CONSTANTLY ENGAGED IN IMPROVING ITS PRODUCTS AND THEREFORE RESERVES THE RIGHT TO MODIFY WITHOUT ANY NOTICE CHARACTERISTICS SHOWN VIA DIVISIONE JULIA, 7/B - 36031 DUEVILLE [VI] ITALY • TEL. 0039.0444.593290 - FAX. 0039.0444.593357 • E-MAIL. INFO@BINOTTO.COM

Pag.: MFC 187.5.8050_02